


SPECIFICATION SHEET

SNAP ASYMMETRICAL BEAM

SNAP FEATURES A PATENTED DESIGN WITH A COLLAPSIBLE THREAD. WITH ONE EASY PUSH, THE MODULE SNAPS SECURELY INTO THE RAIL. REMOVAL IS ONLY POSSIBLE WITH A UNIQUE EXTRACTION TOOL.

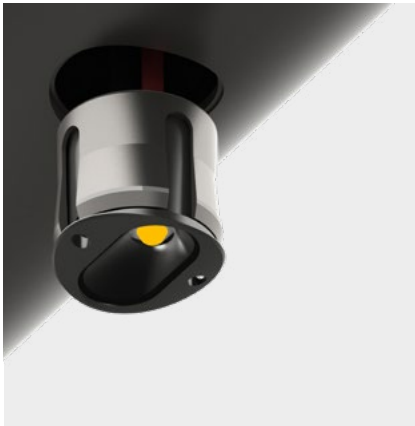

SNP-VA-FF-WW	SNAP VA FLAT FACADE 3000°K WARM WHITE
SNP-VA-FF-NW	SNAP VA FLAT FACADE 4000°K NEUTRAL WHITE
SNP-VA-CF-WW	SNAP VA CURVED FACADE 3000°K WARM WHITE
SNP-VA-CF-NW	SNAP VA CURVED FACADE 4000°K NEUTRAL WHITE

OPTIONS:

COLOUR TEMPERATURE 2700°K / 3500°K
CUSTOM BEAM ANGLES

TECHNICAL

1.4W / 500mA / 2.8Vf
3000°K - 168lm / 4000°K - 178lm
Ra80+ / 3 STEP MACADAM ELLIPSE

OPTICS

LENS PC - IP65 IK10
BOROSILICATE - IP67

PROTECTION CLASS

IK10
IP65

MATERIAL

316 STAINLESS STEEL

AMBIENT OPERATING CONDITIONS

MIN. -40° / MAX. 55°

ELECTRICAL

COOLSPLICE CONNECTOR

APERTURE


15mm, OR
15mm + (16mm x 1.6mm) COUNTERBORE

INSTALLATION

MIN. 1.5mm WALL THICKNESS
MIN. 25mm DIAMETER
CURVED OR FLAT MOUNTING SURFACE


SNAP VA CF

CURVED FACE DETAIL




SNAP VA FF

FLAT FACE DETAIL



SNAP VA

ASYMMETRICAL DISTRIBUTION FOR VERTICAL MOUNTING.

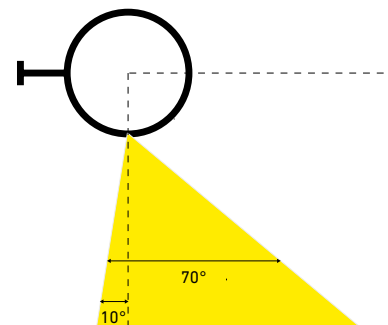


SPECIFICATION SHEET

POLAR DIAGRAMS

SNAP VA IS AN ASYMMETRICAL DISTRIBUTION FOR VERTICAL MOUNTING IN THE UNDERSIDE OF A HANDRAIL. SNAP VA IS AVAILABLE IN A RANGE OF STANDARD DISTRIBUTIONS AND SPECIAL ANGLES ON REQUEST.

SNAP VA 30
ASYMMETRICAL BEAM 3000°K

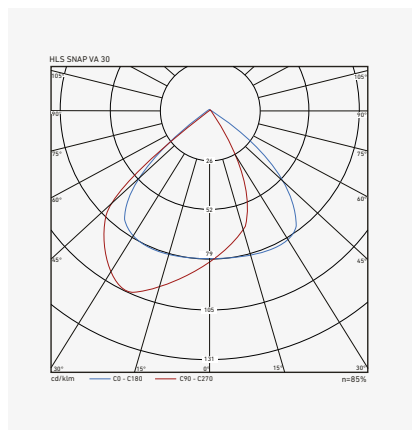

SNAP VA 40
ASYMMETRICAL BEAM 4000°K

